



CoatPro

Non-contact coating thickness measurement.
Inline, Atline, Laboratory.

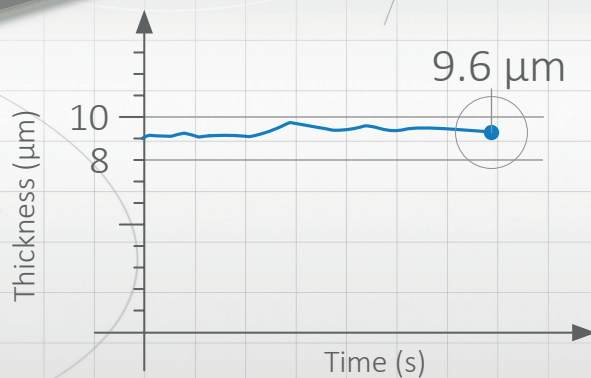

- + Safe technology
- + Easy connection
- + 5 min calibration
- + Low maintenance

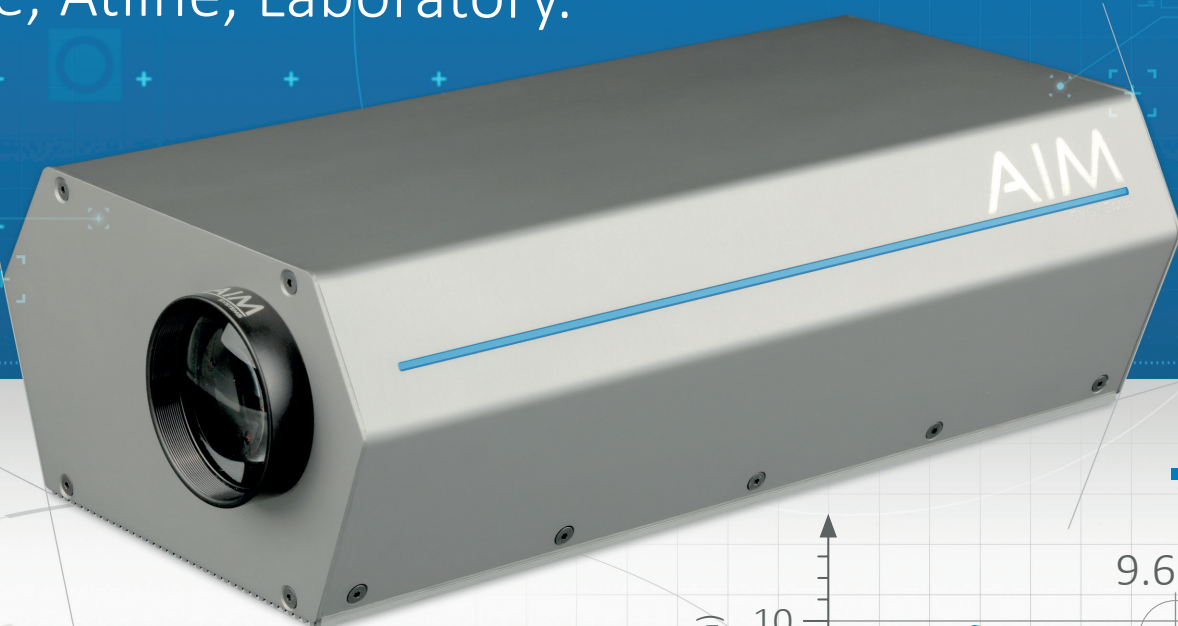

- + Robust design
- + Inline-suitable
- + Robot-suitable
- + ATEX-suitable



- + Quality control
- + Digital twin
- + Audit preparation
- + Process automation

Technical Data*




coating
range

1 – 3,000 μm



acquisition
time

down to 5 ms



working
distance

5 – 25 cm



precision

< $\pm 0.5 \mu\text{m}$



angle
tolerance

$\pm 75^\circ$




coating
conditions

wet & dry



moving
parts



complex
geometries



continuous
acquisition



* typ. values, can be customized.

Please do not hesitate to contact us with your questions or directly book a free consultation.



www.aimsys.de



contact@aimsys.de



+49 6894 38823-20

AIM Systems GmbH
Kaiserstraße 170
66386 St. Ingbert, Germany



ISO 9001

Certified
Quality Management System

www.tuv-sud.com/ms-cert